

4 MODULE ENCLOSURES FOR M36 DIN-RAIL



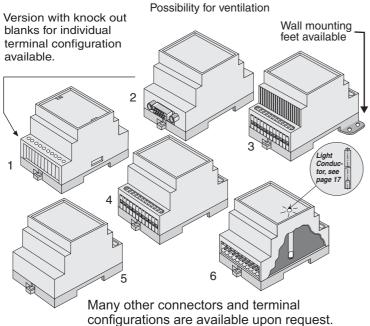

Options:


- open version for bigger terminals
- no terminal numbers
- red, grey or infra-red lid.
- click in frontpanel.
- hinged lid.
- not all versions are available for all sizes.

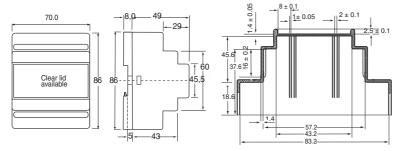

For detailed drawings please see www.bernic.dk or ask for a CAD drawing

HORIZONTAL PCB DIMENSIONS:

PCB shown from copperside



Complete, 257 for plugable	p/n 4969010701
Complete, 257 ventilated	p/n 4969010705
Complete, 605 for fixed terminals	p/n 4969010702
Complete, 605 ventilated	p/n 4969010704
Complete, closed, no terminals	p/n 4969010700
Complete, closed ventilated	p/n 4969010706
Complete, knock out	p/n 4969010703
Complete, knock out ventilated	p/n 4969010707
Top part, grey, 605/250, fixed terminals	p/n 4969000702
Top part, grey, 257 for plugable	p/n 4969000701
Top part, grey, closed, no terminals	p/n 4969000700
Base part with clip and 2 screws	p/n 4969002701
DIN-rail clip for 700	p/n 0669000604
Transparent lid for 700	p/n 4969001700
Packing for 700	p/n 2068700001
Raw PCB for 700	p/n 4999000700
Terminal for 700, 257/12, HO/A, PCB part	p/n 1155712580
Terminal for 700, 256/12, wire part	p/n 1155612080
Terminal for 700, 605/12, fixed terminals	p/n 3950141208
Screw/selfcutting 2 pcs.	p/n 7006102965

Many more p/n available - please enquire.

 All measurements are in mm. • Please note that most plugable terminals are in 5,08 pitch and need a bigger hole in the PCB

TYPE 700:

Module enclosure for M36 DIN-rail.

Series 700 is, if requested, available in several colours and with customer specified holes

Lid, PCB, customized label and packing is available. Possibility for both base and top PCB. A closed version without terminals is also available.

Trimmers and spindles that fit the height of the box are available.

TECHNICAL DATA:

TOP PART:

Material: Lexan 940 Colour: Grey (RAL 7035)

100°C Max. temperature: Width: 70.0 mm (4 modules)

Label measurement: 41.0 x 65.0 mm Self-extinguishing: Acc. to UL94-V0

IP Protection: IP 20

BASE PART:

Material: Noryl VO 1550 Black (RAL 9005) Colour:

100°C Max. temperature: Max. wire dia.: 2 x 2.5 mm²

Max. load: 16 A (for higher load please enquire) Terminals: 24 fixed or plugable Mounting: DIN-rail (EN50022) Self-extinguishing:

Acc. to UL94-V0

ORDER CODE: