




ENCLOSURE FOR WALL MOUNTING

SERIES
601
602

Counter sunk hole for self tapping screw

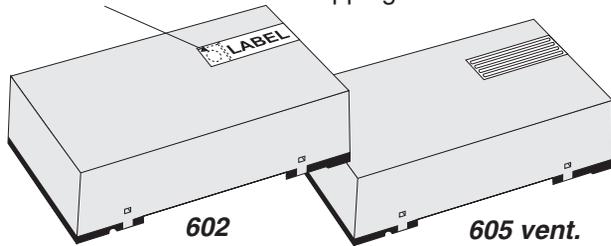

Push button switch,
See page 24




602 HIGH CLOSED VERSION (31 MM)

Also available as 605 with ventilation in the front

Also available as 607 with ventilation in the side.



Light Conductor, see page 23

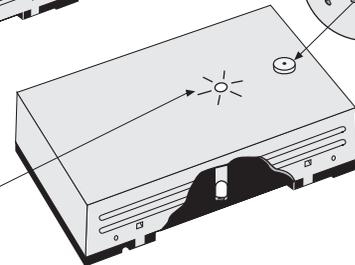

Enclosure for wall mounting. Closed version. Suitable for alarms etc. Possibility for 2 PCB's. PCB and packing are available. Standard colour is white/black but other colours can be supplied upon request. Label in polycarbonate available in customer specified colours. Base part available with cold press fixing taps or four self tapping screws to fix the PCB.



TECHNICAL DATA: 601 / 602 / 605 / 607

Top part:	Cyclopol C 2800
Base part:	Lexan 940
Colour:	White/black (RAL9010/RAL9005)
Temperature range:	-30 - +100°C
Self-extinguishing:	Acc. to UL94-V0


601 STANDARD VERSION (25 MM)

Enclosure for wall mounting. Suitable for sensors etc. Possibility for 2 PCB's. PCB and packing are available. Standard colour is white/black but other colours can be supplied upon request.

Base part available with cold press fixing taps or four self tapping screws to fix the PCB.

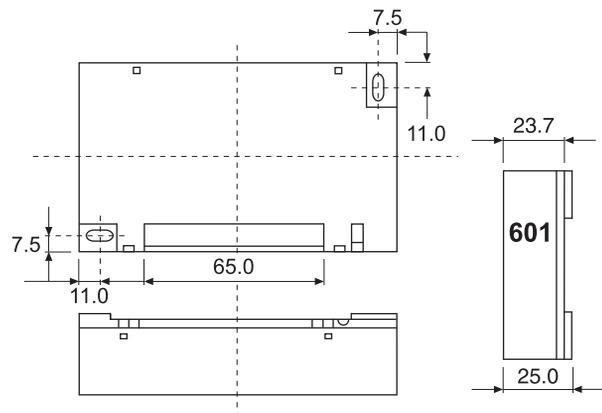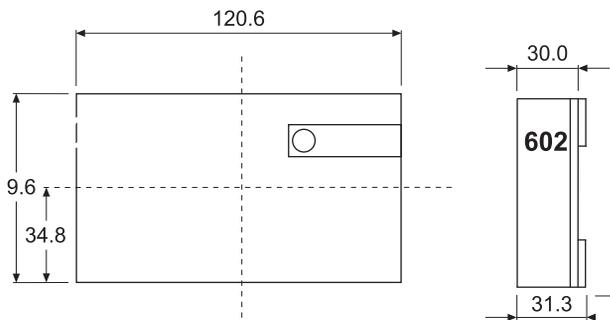

602 - PCB DIMENSIONS: (for 601 - see page 23)

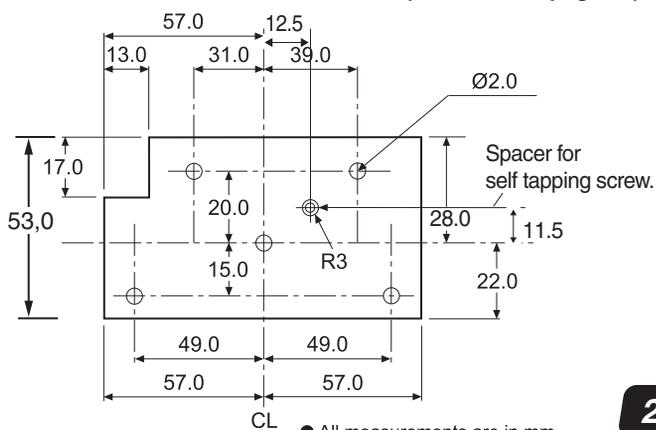

● All measurements are in mm.

TYPE 601:	ORDER CODE:
Top part	p/n 0669000602
Base part w.cold press taps	p/n 0669000609
Base part f.self tapping screws	p/n 0699000610
Raw PCB	p/n 4999000600
Packing	p/n 2068601004
Light conductor	p/n 4972001258
Push button switch	p/n 4955127313

TYPE 602:	ORDER CODE:
602 complete	p/n 0669002622
Top part	p/n 0669000606
Base part w. integrated spacer	p/n 0669001622
Raw PCB	p/n 4999000600
Label in polycarbonate, white (Available in customer specified colours)	p/n 0669000607
Screw for top	p/n 2069441331
Packing	p/n 2068602004
Light conductor	p/n 4972001257